

**DRYWALL HAMMER PLUG WITH SCREW**

**DHP**



precast plaster blocks



aerated concrete


**FEATURES**

- Hammer-in plug for precast plaster blocks and aerated concrete
- Flat plug which prevents rotation when tightened.
- Recommended load (given for indicative purposes) : 20 to 30 kg


**INSTALLATION**




**1**  
Drill at Ø6 mm  
(depth 60 mm)

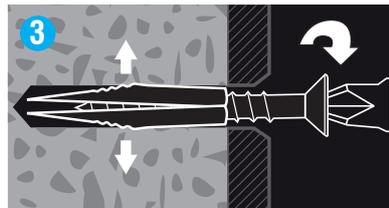


**3**  
Screw through the fixed part to expand the plug.

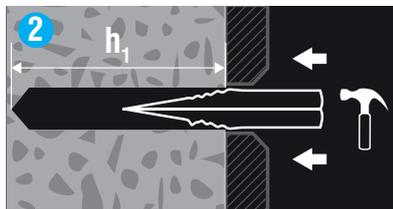

**2**  
Introduce the CP plug in the wall with little repetitive strokes with a hammer with care to not damage the plug head.

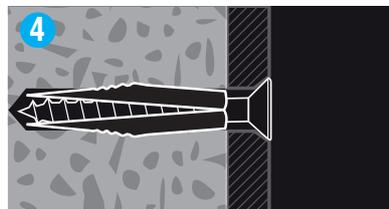

**INSTALLATION DATA**

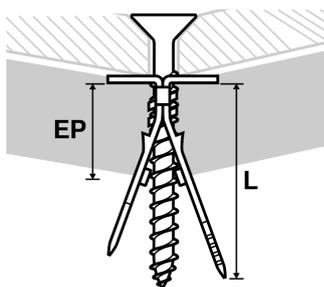

Item code	Plug length	Wall thickness	Qty Per Box	Qty per outer	Weight Per 100
	<b>L</b>	<b>EP</b>			
	mm	Min-Max. mm			kg
<b>DHP</b>	30	9-13	150	1 200	0.3