


METAL HAMMER IN PLUG

DN



CONCRETE
SOLID MASONRY
HOLLOW BRICK
HOLLOW CINDERBLOCK

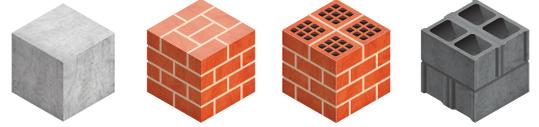

FEATURES

- **Material** : Zinc plated steel
- **Advantages** :
 - Easy and fast setting with hammer.
 - Sets through the fixing material.

APPLICATIONS

light fixing (up to 10kg) in solid or hollow masonry

INSTALLATION

setting possible in solid and hollow masonry (in that case the exterior wall of the masonry must be at least 15mm)

1. Drill a Ø6mm hole
2. Insert the plug in the hole through the object to be fixed (maximum thickness of the object = t_{fix})
3. Hammer the nail in order to expand

DIMENSIONS

Ø	L	⤵	t _{fix}	Codes
Diameter	Length mm	Drill Ø mm	Fixing piece mm	
6	30	6	5	DN0630
	40	6	12	DN0640
	50	6	20	DN0650

