
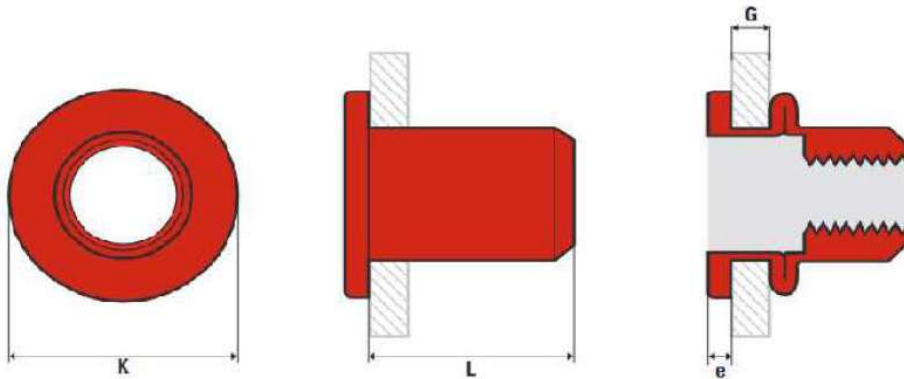



TCD-P STEEL PLAIN BODY FLANGE HEAD INSERT

Insert. Cylindrical head. Steel + zinc plated.



PART NO/REF	M	Hole		K	e	L	G
	Ø (mm)	Min (mm)	Max (mm)	(mm)	(mm)	(mm)	min-max (mm)
TCD0430P	M4	5.8	6.2	9.0	1.0	11.0	0.3-3.0
TCD0530P	M5	6.8	7.2	10.0	1.0	13.0	0.5-3.0
TCD0630P	M6	8.8	9.2	13.0	1.5	16.0	0.5-3.0
TCD0830P	M8	10.8	11.2	16.0	1.5	17.5	0.5-3.0

	DRILLING	RECOMMENDED MAX TORQUE	PULL-OUT	SHEAR
				
M (mm)	(mm)	(Nm)	(N)	(N)
M4	6.0	4.5	5 000	1 700
M5	7.0	5.4	11 300	2 800
M6	9.0	19.8	18 000	3 500
M8	11.0	29.0	28 000	4 500