
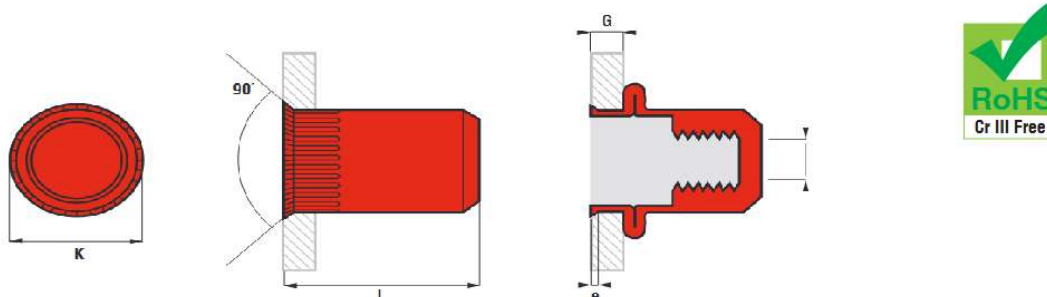





TCRB - STEEL KNURLED REDUCED HEAD CLOSED END INSERT

Insert/Knurled. Reduced countersunk head. Steel + zinc plated.



PART NO/REF	M	Hole		K	e	L	G
	Ø (mm)	Min (mm)	Max (mm)	(mm)	(mm)	(mm)	min-max (mm)
TCRB0430	M4	5.8	6.2	7.0	0.5	15.0	0.5-2.0
TCRB0530	M5	6.8	7.2	8.0	0.5	16.5	0.5-2.0
TCRB0630	M6	8.8	9.2	10.0	0.6	20.5	0.5-3.0
TCRB0830	M8	10.8	11.2	12.0	0.6	23.0	1.0-3.0

	DRILLING	RECOMMENDED MAX TORQUE	PULL-OUT	SHEAR
				
M (mm)	(mm)	(Nm)	(N)	(N)
M4	6.0	4.5	4 840	1 600
M5	7.0	6.0	11 070	2 700
M6	9.0	20.0	17 600	3 400
M8	11.0	29.0	27 000	4 400