
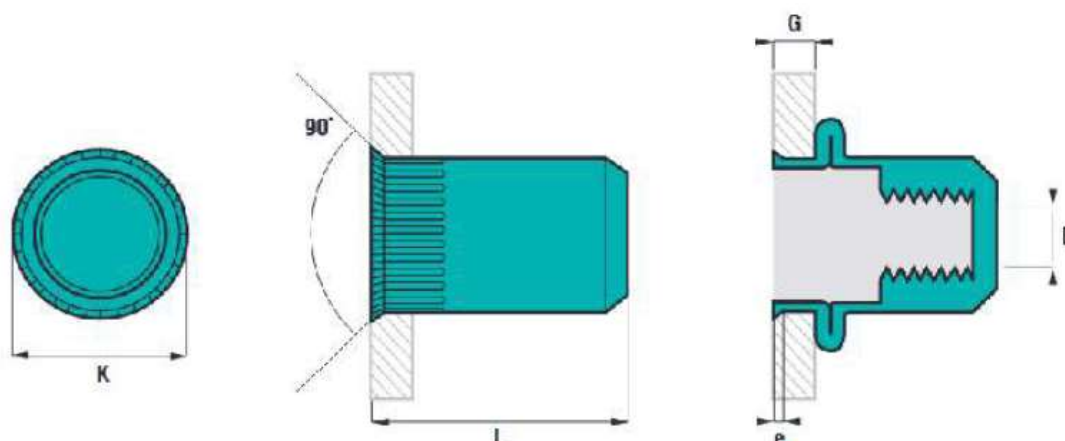





ENRB - STAINLESS KNURLED REDUCED CLOSED END INSERT

Insert/Knurled. Reduced countersunk head. Stainless steel A2.



PART NO/REF	M	K	L	e	GRIP
	Ø (mm)	(mm)	(mm)	(mm)	min-max(mm)
ENRB0420	M4	9.0	16.0	0.8	0.5-2.0
ENRB0525	M5	10.0	17.0	1.0	0.5-2.5
ENRB0630	M6	12.3	19.0	1.3	0.5-3.0
ENRB0830	M8	15.0	21.5	1.5	1.0-3.5

	DRILLING	RECOMMENDED MAX TORQUE	PULL-OUT	SHEAR
				
M (mm)	(mm)	(Nm)	(N)	(N)
M4	6.0	7.0	6 800	2 600
M5	7.0	10.0	11 700	2 900
M6	9.0	20.0	18 000	4 900
M8	11.0	28.0	24 000	6 800