
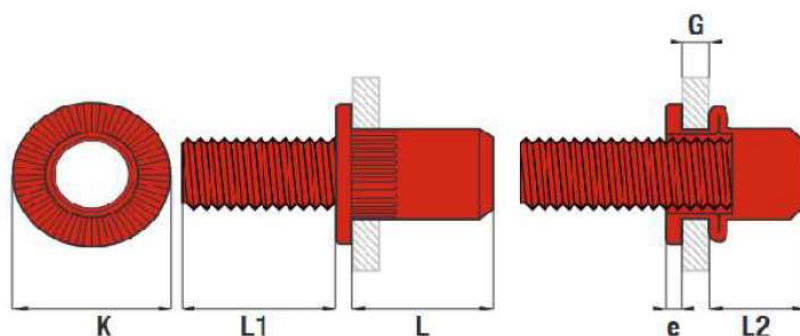



GCD - STEEL RIV STUD

Rivstud. Cylindrical head. Stell + zinc plated.



PART NO/REF	M	L	L1	L2	K	e	G
	Ø (mm)	(mm)	(mm)	(mm)	(mm)	(mm)	min-max (mm)
GCD0420	M4	8.5	15.0	4.0	8.0	0.5	0.5-2.0
GCD0430		9.5	15.0		8.0	0.8	2.0-3.0
GCD0520	M5	10.0	15.0	5.0	9.0	0.8	0.5-2.0
GCD0538		11.0	15.0		9.0	0.8	2.0-4.8
GCD0625	M6	11.0	15.0	6.0	10.0	1.0	0.5-2.5
GCD0640		12.5	15.0		10.0	1.0	2.5-4.0
GCD0830	M8	14.0	20.0	8.0	12.0	1.0	1.0-3.0
GCD0850		16.0	20.0		12.0	1.0	3.0-5.0

	DRILLING	RECOMMENDED MAX TORQUE	PULL-OUT
			
M (mm)	(mm)	(Nm)	(N)
M4	5.5	4.0	4 000
M5	6.6	7.0	7 000
M6	7.8	10.0	10 000
M8	9.9	30.0	28 000