



SD - DOME HEAD

Mandrel: Steel. Body: Steel. Dome Head.

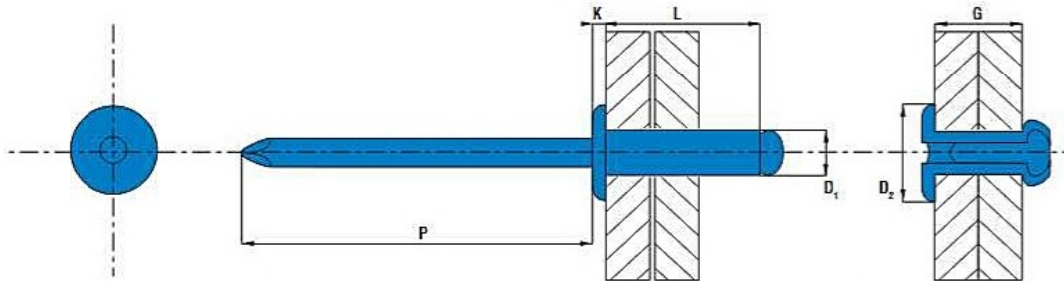


PART NO/REF	D ₁	L	D ₂	K	Hole diameter	P	G
	Ø (mm)	(mm) +1.0 / -0.2	Ø (mm)	(mm)	Ø (mm)	mini (mm)	min-max (mm)
SD3006	3.0 +0.08 / -0.10	6.0	6.5 -0.7 / +0.0	0.80 -0.2 / +0.2	3.1	27	1.5-3.0
SD3008		8.0					3.0-5.0
SD3010		10.0					5.0-7.0
SD3012		12.0					7.0-9.0
SD3206	3.2 +0.08 / -0.10	6.0	6.5 -0.7 / +0.0	0.80 -0.2 / +0.2	3.3	27	1.5-3.0
SD3208		8.0					3.0-5.0
SD3210		10.0					5.0-7.0
SD3212		12.0					7.0-9.0
SD3214		14.0					9.0-11.0
SD3216		16.0					11.0-13.0
SD4006	4.0 +0.08 / -0.15	6.0	8.0 -1.0 / +0.0	1.00 -0.3 / +0.3	4.1	27	0.5-2.5
SD4008		8.0					2.5-4.5
SD4010		10.0					4.5-6.5
SD4012		12.0					6.5-8.5
SD4014		14.0					8.5-10.5
SD4016		16.0					10.5-12.5
SD4018		18.0					12.5-14.5
SD4020		20.0					14.5-16.5

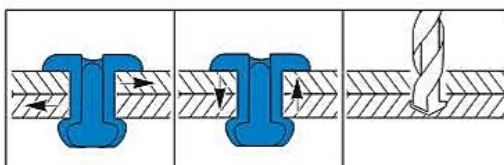


D ₁ (mm)	(N)	(N)	Ø (mm)
3.0	950	1 125	3.1
3.2	1 100	1 285	3.3
4.0	1 700	2 200	4.1

SD - DOME HEAD

Mandrel: Steel. Body: Steel. Dome Head.

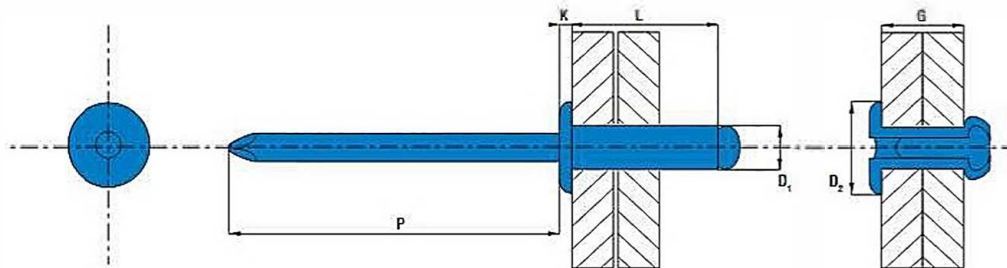

PART NO/REF	D ₁	L	D ₂	K	Hole diameter	P	G
	Ø (mm)	(mm) +1.0 / -0.2	Ø (mm)	(mm)	Ø (mm)	mini (mm)	min-max (mm)
SD4808	4.8 +0.08 / -0.15	8.0	9.5 -1.0 / +0.0	1.10 -0.3 / +0.3	4.9	27	2.5-4.5
SD4810		10.0					4.5-6.0
SD4812		12.0					6.0-8.0
SD4814		14.0					8.0-10.0
SD4816		16.0					10.0-11.5
SD4818		18.0					11.5-13.5
SD4820		20.0					13.5-15.0
SD4825		25.0					17.0-20.0
SD4830		30.0					20.0-25.0
SD6012	6.0 +0.08 / -0.15	12.0	12.0 -1.5 / +0.0	1.50 -0.4 / +0.4	6.1	31	4.5-6.5
SD6015		15.0					6.5-9.5
SD6018		18.0					9.5-12.5
SD6022		22.0					12.5-16.0
SD6026		26.0					16.0-19.0
SD6412	6.4 +0.08 / -0.15	12.0	13.0 -1.5 / +0.0	1.80 -0.4 / +0.4	6.5	31	3.0-6.0
SD6415		15.0					6.0-9.0
SD6418		18.0					9.0-12.0
SD6422		22.0					12.0-16.0
SD6426		26.0					16.0-20.0
SD6430		30.0					19.0-24.0

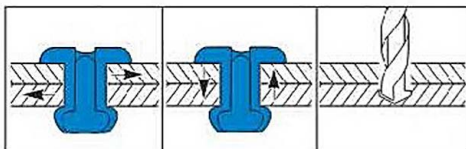

D ₁ (mm)	(N)	(N)	Ø (mm)
4.8	2 300	2 820	4.9
6.0	4 300	5 020	6.1
6.4	4 900	5 700	6.5