

# A4D - Standard Rivet


 Rivetto standard  nity zrywalne standardowe  Trhací nýty



Dome Head | Testa STANDARD | kołnierz Standardowy | Plochá hlava

**1 Body:** Stainless Steel A4 | ACCIAIO INOX A4 | STAL NIERDZEWNA A4 | NEREZ A4

**2 Mandrel:** Stainless Steel A4 | ACCIAIO INOX A4 | STAL NIERDZEWNA A4 | NEREZ A4

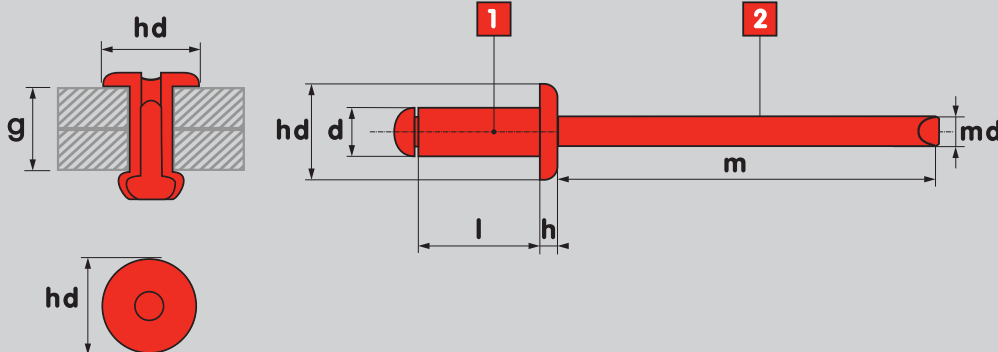

## Ø 3.2 mm

### Dimensions

(see diagram):

**d** = 3.2 (+0.08/-0.15)mm

**Hole size** = 3.3 mm

**hd** = 6.5 (+0.2/-0.2)mm

**h** = 1.3 (+0.2/-0.2) mm

**md** = 1.8 mm

**m** = 25mm (min)

| Product Code UK | Product Code EU | Length* (mm) | Grip range (mm) |      | Inner Box qty. | Outer Box qty. | Shear N | Tensile N |
|-----------------|-----------------|--------------|-----------------|------|----------------|----------------|---------|-----------|
|                 |                 |              | Min.            | Max. |                |                |         |           |
| A4D3206         | BND3206-BC      | 6            | 0.5             | 3    | 2000           | 12000          | 1800    | 2500      |
| A4D3208         | BND3208-BC      | 8            | 3               | 5    | 2000           | 12000          | 1800    | 2500      |
| A4D3210         | BND3210-BC      | 10           | 5               | 6.5  | 2000           | 8000           | 1800    | 2500      |
| A4D3212         | BND3212-BC      | 12           | 6.5             | 8.5  | 1500           | 6000           | 1800    | 2500      |

## Ø 4.0 mm

### Dimensions

(see diagram):

**d** = 4 (+0.08/-0.15)mm

**Hole size** = 4.1 mm

**hd** = 8 (+0.3/-0.3)mm

**h** = 1.7 (+0.3/-0.3) mm

**md** = 2.2 mm

**m** = 27mm (min)

| Product Code UK | Product Code EU | Length* (mm) | Grip range (mm) |      | Inner Box qty. | Outer Box qty. | Shear N | Tensile N |
|-----------------|-----------------|--------------|-----------------|------|----------------|----------------|---------|-----------|
|                 |                 |              | Min.            | Max. |                |                |         |           |
| A4D4008         | BND4008-BC      | 8            | 2.5             | 4.5  | 1000           | 6000           | 3100    | 3800      |
| A4D4010         | BND4010-BC      | 10           | 4.5             | 6.5  | 1000           | 6000           | 3100    | 3800      |
| A4D4012         | BND4013-BC      | 13           | 6.5             | 8.5  | 1000           | 6000           | 3100    | 3800      |
| A4D4016         | BND4016-BC      | 16           | 10              | 12   | 1000           | 6000           | 3100    | 3800      |

## Ø 4.8 mm

### Dimensions

(see diagram):

**d** = 4.8 (+0.08/-0.15)mm

**Hole size** = 4.9 mm

**hd** = 9.5 (+0.3/-0.3)mm

**h** = 2 (+0.3/-0.3) mm

**md** = 2.7 mm

**m** = 27mm (min)

| Product Code UK | Product Code EU | Length* (mm) | Grip range (mm) |      | Inner Box qty. | Outer Box qty. | Shear N | Tensile N |
|-----------------|-----------------|--------------|-----------------|------|----------------|----------------|---------|-----------|
|                 |                 |              | Min.            | Max. |                |                |         |           |
| A4D4810         | BND4810-BC      | 10           | 4               | 6    | 1000           | 4000           | 4500    | 6000      |
| A4D4812         | BND4812-BC      | 12           | 6               | 8    | 1000           | 4000           | 4500    | 6000      |
| A4D4814         | BND4814-BC      | 14           | 8               | 10   | 1000           | 4000           | 4500    | 6000      |
| A4D4816         | BND4816-BC      | 16           | 8               | 11   | 500            | 3000           | 4500    | 6000      |
| A4D4818         | BND4818-BC      | 18           | 11              | 13   | 500            | 3000           | 4500    | 6000      |
| A4D4820         | BND4820-BC      | 20           | 13              | 16   | 500            | 3000           | 4500    | 6000      |
| A4D4825         | BND4825-BC      | 25           | 16              | 19   | 500            | 2000           | 4500    | 6000      |

\* tolerance +1.0/-0.20mm

Page 1/2

element®  
Available from:

the RIVET  
COMPANY

The Rivet Company, Unit 7,  
Beacon Business Park,  
Weston Road, Stafford ST18 0DG.

Tel: 01785 246539  
Email: sales@therivetco.co.uk  
[www.therivetcompany.co.uk](http://www.therivetcompany.co.uk)

# A4D - Standard Rivet

 Rivetto standard  nity zrywalne standardowe  Trhací nýty

## Ø 6.4 mm

### Dimensions

(see diagram):

**d** = 6.4 (+0.08/-0.15)mm

**Hole size** = 6.5 mm

**hd** = 13 -1mm

**h** = (+0.3/-0.3) mm

**md** = mm

**m** = 27mm (min)

| Product Code UK | Product Code EU | Length* (mm) | Grip range (mm) |      | Inner Box qty. | Outer Box qty. | Shear N | Tensile N |
|-----------------|-----------------|--------------|-----------------|------|----------------|----------------|---------|-----------|
|                 |                 |              | Min.            | Max. |                |                |         |           |
| A4D6414         | BND6414         | 14           | 6               | 9    | 250            | 2000           | 6500    | 8850      |
| A4D6410         | BND6410         | 10           | 1               | 3    | 250            | 2000           | 6500    | 8850      |
| A4D6412         | BND6412-BC      | 12           | 3               | 6    | 250            | 2000           | 6500    | 8850      |
| A4D6416         | BND6416-BC      | 16           | 6               | 10   | 250            | 2000           | 6500    | 8850      |
| A4D6418         | BND6418-BC      | 18           | 9               | 12   | 250            | 2000           | 6500    | 8850      |
| A4D6420         | BND6420-BC      | 20           | 12              | 14   | 250            | 2000           | 6500    | 8850      |

\* tolerance +1.0/-0.20mm

Page 2/2