

AKS - Standard Rivet



 Rivetto standard  nity zrywalne standardowe  Trhací nýty



Countersunk Head | TESTA SVASATA | kołnierz STOŻKOWY | Zapuštěná hlava

1 Body: Aluminium | ALLUMINIO | ALUMINIUM | HLINÍK

2 Mandrel: Steel | ACCIAIO | STAL | OCEL

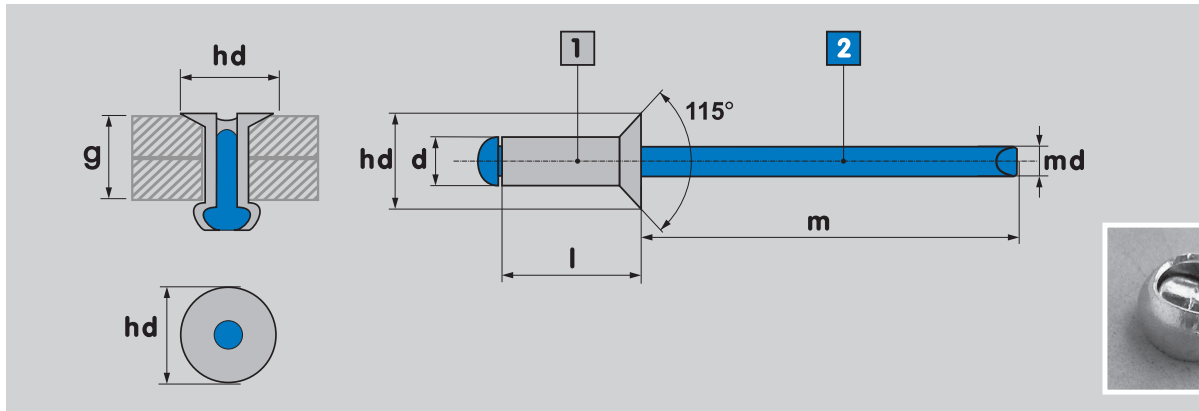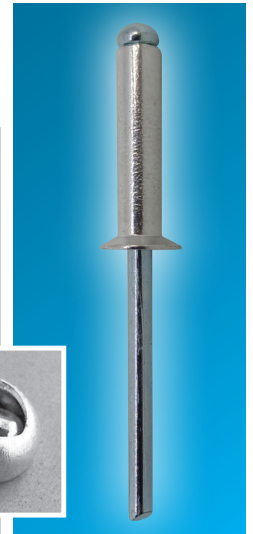

Ø2.4 mm

Dimensions

(see diagram):

d = 2.4 (+0.08/-0.15)mm

Hole size = 2.5 mm

hd = 5 (+0.2/-0.2)mm

h = 1 (+0.2/-0.2) mm

md = 1.4 mm

m = 25mm (min)

Product Code UK	Product Code EU	Length* (mm)	Grip range (mm)		Inner Box qty.	Outer Box qty.	Shear N	Tensile N
			Min.	Max.				
AKS2406	ASK2406-BC	6	2	4	2000	12000	300	500
AKS2408	ASK2408-BC	8	4	6	2000	12000	300	500
AKS2410	ASK2410-BC	10	6	8	2000	12000	300	500

Ø 3.0 mm

Dimensions

(see diagram):

d = 3 (+0.08/-0.15)mm

Hole size = 3.1 mm

hd = 6 (+0.2/-0.2)mm

h = 1.3 (+0.2/-0.2) mm

md = 1.8 mm

m = 25mm (min)

Product Code UK	Product Code EU	Length* (mm)	Grip range (mm)		Inner Box qty.	Outer Box qty.	Shear N	Tensile N
			Min.	Max.				
AKS3006	ASK3006-BC	6	2	3.5	2000	12000	500	800
AKS3008	ASK3008-BC	8	3.5	5	2000	12000	500	800
AKS3010	ASK3010-BC	10	5	7	2000	8000	500	800
AKS3012	ASK3012-BC	12	7	9	2000	8000	500	800

Ø 3.2 mm

Dimensions

(see diagram):

d = 3.2 (+0.08/-0.15)mm

Hole size = 3.3 mm

hd = 6 (+0.2/-0.2)mm

h = 1.3 (+0.2/-0.2) mm

md = 1.8 mm

m = 25mm (min)

Product Code UK	Product Code EU	Length* (mm)	Grip range (mm)		Inner Box qty.	Outer Box qty.	Shear N	Tensile N
			Min.	Max.				
AKS3206	ASK3206-BC	6	2	3.5	2000	12000	760	980
AKS3208	ASK3208-BC	8	3.5	5	2000	8000	760	980
AKS3210	ASK3210-BC	10	5	7	2000	8000	760	980
AKS3212	ASK3212-BC	12	7	9	2000	8000	760	980
AKS3214	ASK3214-BC	14	9	11	1000	6000	760	980
AKS3216	ASK3216-BC	16	9	13	1000	4000	760	980
AKS3218	ASK32180-BC	18	13	15	1000	4000	760	980

* tolerance +1.0/-0.20mm

Page 1/2

element®
Available from:

the RIVET
COMPANY

The Rivet Company, Unit 7,
Beacon Business Park,
Weston Road, Stafford ST18 0DG.

Tel: 01785 246539
Email: sales@therivetco.co.uk
www.therivetcompany.co.uk

AKS - Standard Rivet

 Rivetto standard  nity zrywalne standardowe  Trhací nýty

Ø 4.0 mm

Dimensions

(see diagram):

d = 4 (+0.08/-0.15)mm

Hole size = 4.1 mm

hd = 7.5 (+0.3/-0.3)mm

h = 1.7 (+0.3/-0.3) mm

md = 2.2 mm

m = 27mm (min)

Product Code UK	Product Code EU	Length* (mm)	Grip range (mm)		Inner Box qty.	Outer Box qty.	Shear N	Tensile N
			Min.	Max.				
AKS4006	ASK4006-BC	6	2	3	1000	6000	1200	1600
AKS4008	ASK4008-BC	8	2	5	1000	6000	1200	1600
AKS4010	ASK4010-BC	10	5	6.5	1000	6000	1200	1600
AKS4012	ASK4012-BC	12	6.5	8.5	1000	6000	1200	1600
AKS4014	ASK40140-BC	14	8.5	10.5	1000	6000	1200	1600
AKS4016	ASK4016-BC	16	10.5	12.5	1000	6000	1200	1600
AKS4018	ASK4018-BC	18	12.5	14.5	1000	4000	1200	1600
AKS4020	ASK4020-BC	20	12.5	16.5	500	4000	1200	1600

Ø 4.8 mm

Dimensions

(see diagram):

d = 4.8 (+0.08/-0.15)mm

Hole size = 4.9 mm

hd = 9 (+0.3/-0.3)mm

h = 2 (+0.3/-0.3) mm

md = 2.7 mm

m = 27mm (min)

Product Code UK	Product Code EU	Length* (mm)	Grip range (mm)		Inner Box qty.	Outer Box qty.	Shear N	Tensile N
			Min.	Max.				
AKS4808	ASK4808-BC	8	2.5	4	1000	4000	1690	2230
AKS4810	ASK4810-BC	10	4	6	1000	4000	1690	2230
AKS4812	ASK4812-BC	12	6	8	1000	4000	1690	2230
AKS4814	ASK4814-BC	14	8	10	1000	4000	1690	2230
AKS4816	ASK4816-BC	16	8	12	1000	4000	1690	2230
AKS4818	ASK4818-BC	18	10	13	500	3000	1690	2230
AKS4820	ASK4820-BC	20	12	15	500	3000	1690	2230
AKS4822	ASK48220-BC	22	14	17	500	3000	1690	2230
AKS4825	ASK4825-BC	25	15	20	500	2000	1690	2230
AKS4830	ASK4830-BC	30	21	25	500	2000	1690	2230
AKS4835	ASK4835-BC	35	25	29	500	2000	1690	2230

* tolerance +1.0/-0.20mm

Page 2/2