

RNSR - Knurled Rivetnut


 Inserto filettato cilindrico zigrinato
  nitonakrętki radełkowane
  rádlované tělo



Reduced Head | Testa ridotta | kołnierz ZREDUKOWANY | Redukovaná hlava

Knurled Insert | Inserto filettato cilindrico zigrinato | nitonakrętki radełkowane | rádlované tělo

Steel | ACCIAIO | STAL | OCEL

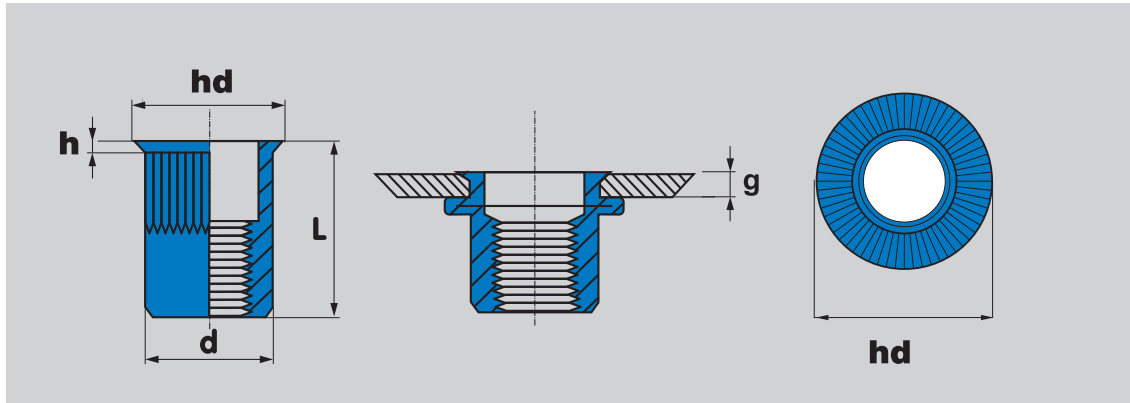

Product Code UK	Product Code EU	Diameter (d) (+0.07/-0.1)	Length (L) (+0.5/-0.5)	Head Diameter (hd) (+0.5/-0.1)	Head Thickness (h) (+0.20/-0.20)	Grip range (mm)		Inner Box qty.	Outer Box qty.
						Min. (g)	Max.		
RNSR0330	TCR0330-BC	M3	9	6	0.5	0.5	2	1,000	6,000
RNSR0430	TCR0430-BC	M4	10	6.5	0.5	0.5	3	1,000	6,000
RNSR0440	TCR0440-BC	M4	13	6.5	0.5	3	4	1,000	6,000
RNSR0530	TCR0530-BC	M5	11.5	7.5	0.5	0.5	3	1,000	6,000
RNSR0550	TCR0550-BC	M5	13	7.5	0.5	3	5	1,000	6,000
RNSR0630	TCR0630-BC	M6	14	9.5	0.5	0.5	3	1,000	4,000
RNSR0650	TCR0650-BC	M6	16	9.5	0.5	3	5	1,000	4,000
RNSR0830	TCR0830-BC	M8	16.5	11.5	0.5	0.5	3	500	2,000
RNSR0850	TCR0850-BC	M8	18.5	11.5	0.5	3	5	500	2,000
RNSR1035	TCR1035-BC	M10	19.5	13.5	0.7	1	3.5	250	1,000
RNSR1030-12	TCR1030(12)-BC	M10	19.5	13.5	0.7	1	3.5	250	1,000
RNSR1060	TCR1060-BC	M10	22	13.5	0.7	3.5	6	250	1,000
RNSR1240	TCR1240-BC	M12	24	17.5	0.75	1	4	200	800
RNSR1260	TCR1260-BC	M12	26.5	17.5	0.75	3.5	6	200	800

Size Ø	Hole Size (mm)	Recommended Max Torque (Nm)	Pull Out (N)	Shear (N)
M3	5	2.5	4,000	900
M4	6	4	6,600	1,600
M5	7	5	9,200	2,200
M6	9	15	17,000	2,400
M8	11	18	22,000	2,900
M10	13	30	32,400	4,300
M12	16	40	48,000	6,800


 Available from:



The Rivet Company, Unit 7,
 Beacon Business Park,
 Weston Road, Stafford ST18 0DG.

Tel: 01785 246539
 Email: sales@therivetco.co.uk
www.therivetcompany.co.uk