

SBT - Triform Rivet with washer

 Rivetti triform con
guarn. di tenuta

 nit triform z podkładką
uszczelniającą





 Mašličkový nýt
s těsnícím kroužkem


THE ART OF RIVETING KNOWLEDGE

Dome Head | Testa STANDARD | kołnierz Standardowy | Plochá hlava

1 Body: Steel | ACCIAIO | STAL | OCEL

2 Mandrel: Steel | ACCIAIO | STAL | OCEL

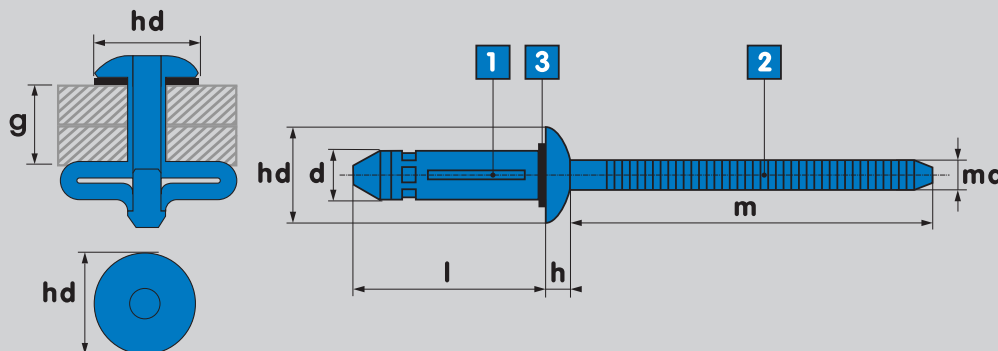

Ø 6.4 mm

Dimensions

(see diagram):

d = 6.4 (+0.08/-0.15)mm

Hole size = 6.5 mm

hd = 14 (+0.2/-0.5)mm

h = 4 (+0.3/-0.3) mm

md = 3.9 mm

m = 29mm (min)

Product Code UK	Product Code EU	Length* (mm)	Grip range (mm)		Inner Box qty.	Outer Box qty.	Shear N	Tensile N
Min.	Max.							
SBT6420	WESD6320-BC	20.7	1	6.4	250	1000	5560	4230
SBT6423	WESD6323-BC	23.9	3.2	9.5	250	1000	5560	4230
SBT6427	WESD6327-BC	27.1	6.4	12.7	250	1000	5560	4230
SBT6430	WESD6330-BC	30.2	9.5	15.9	250	1000	5560	4230

* tolerance +1.0/-0.20mm

element®
Available from:

the
RIVET
COMPANY

The Rivet Company, Unit 7,
Beacon Business Park,
Weston Road, Stafford ST18 0DG.

Tel: 01785 246539
Email: sales@therivetco.co.uk
www.therivetcompany.co.uk