


SD - Standard Rivet

 Rivetto standard  nity zrywalne standardowe  Trhací nýty

Dome Head | Testa STANDARD | kołnierz Standardowy | Plochá hlava

1 Body: Steel | ACCIAIO | STAL | OCEL

2 Mandrel: Steel | ACCIAIO | STAL | OCEL

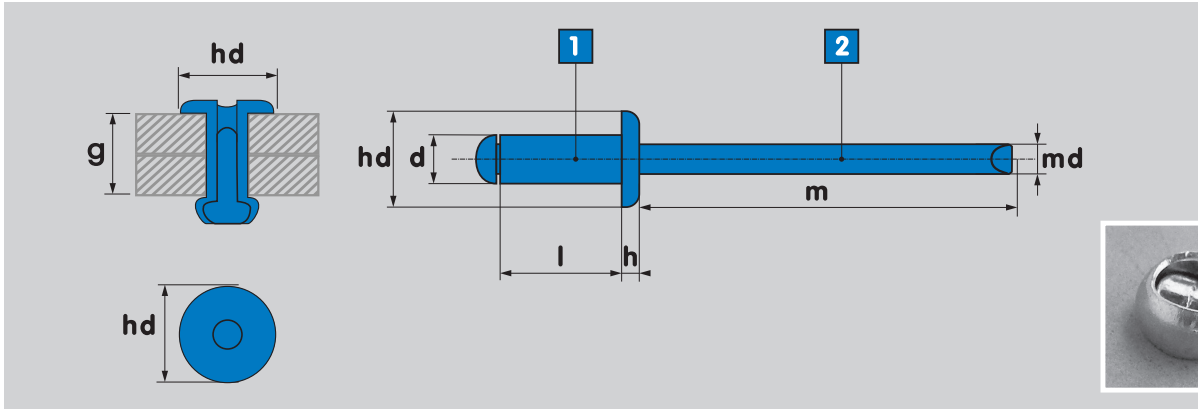

Ø 3.0 mm

Dimensions

(see diagram):

d = 3 (+0.08/-0.15)mm

Hole size = 3.1 mm

hd = 6.5 (+0.2/-0.2)mm

h = 1.3 (+0.2/-0.2) mm

md = 1.8 mm

m = 25mm (min)

Product Code UK	Product Code EU	Length* (mm)	Grip range (mm)		Inner Box qty.	Outer Box qty.	Shear N	Tensile N
			Min.	Max.				
SD3006	SD3006-BC	6	0.5	3	2000	12000	950	1125
SD3008	SD3008-BC	8	3	5	2000	12000	950	1125
SD3010	SD3010-BC	10	5	6.5	2000	8000	950	1125
SD3012	SD3012-BC	12	6.5	8	1000	4000	950	1125

Ø 3.2 mm

Dimensions

(see diagram):

d = 3.2 (+0.08/-0.15)mm

Hole size = 3.3 mm

hd = 6.5 (+0.2/-0.2)mm

h = 1.3 (+0.2/-0.2) mm

md = 1.8 mm

m = 25mm (min)

Product Code UK	Product Code EU	Length* (mm)	Grip range (mm)		Inner Box qty.	Outer Box qty.	Shear N	Tensile N
			Min.	Max.				
SD3206	SD3206-BC	6	0.5	3	2000	12000	1100	1200
SD3208	SD3208-BC	8	3	5	2000	8000	1100	1200
SD3210	SD3210-BC	10	5	6.5	2000	8000	1100	1200
SD3212	SD3212-BC	12	6.5	8	1000	4000	1100	1200
SD3214	SD3214-BC	14	7.5	10	1000	4000	1100	1200
SD3216	SD3216-BC	16	8	12	1000	4000	1100	1200

Ø 4.0 mm

Dimensions

(see diagram):

d = 4 (+0.08/-0.15)mm

Hole size = 4.1 mm

hd = 8 (+0.3/-0.3)mm

h = 1.7 (+0.3/-0.3) mm

md = 2.2 mm

m = 27mm (min)

Product Code UK	Product Code EU	Length* (mm)	Grip range (mm)		Inner Box qty.	Outer Box qty.	Shear N	Tensile N
			Min.	Max.				
SD4006	SD4006-BC	6	1	3	1000	6000	1700	2200
SD4008	SD4008-BC	8	3	5	1000	6000	1700	2200
SD4010	SD4010-BC	10	5	6.5	1000	6000	1700	2200
SD4012	SD4012-BC	12	6.5	9	1000	6000	1700	2200
SD4014	SD4014-BC	14	8.5	10	1000	6000	1700	2200
SD4016	SD4016-BC	16	9	12	1000	4000	1700	2200
SD4018	SD4018-BC	18	12	14	1000	4000	1700	2200
SD4020	SD4020-BC	20	12	16	1000	4000	1700	2200

* tolerance +1.0/-0.20mm

Page 1/2

SD - Standard Rivet

 Rivetto standard  nity zrywalne standardowe  Trhací nýty



Ø 4.8 mm

Dimensions

(see diagram):

d = 4.8 (+0.08/-0.15)mm

Hole size = 4.9 mm

hd = 9.5 (+0.3/-0.3)mm

h = 2 (+0.3/-0.3) mm

md = 2.7 mm

m = 27mm (min)

Product Code UK	Product Code EU	Length* (mm)	Grip range (mm)		Inner Box qty.	Outer Box qty.	Shear N	Tensile N
			Min.	Max.				
SD4806	SD4806-BC	6	1	3	1000	4000	2900	3100
SD4808	SD4808-BC	8	1	4.5	1000	4000	2900	3100
SD4810	SD4810-BC	10	4	6	1000	4000	2900	3100
SD4812	SD4812-BC	12	6	8	1000	4000	2900	3100
SD4814	SD4814-BC	14	7.5	9.5	500	3000	2900	3100
SD4816	SD4816-BC	16	8	11	500	3000	2900	3100

Ø 5.0 mm

Dimensions

(see diagram):

d = 5 (+0.08/-0.15)mm

Hole size = 5.1 mm

hd = 9.5 (+0.3/-0.3)mm

h = 2.1 (+0.3/-0.3) mm

md = 2.7 mm

m = 27mm (min)

Product Code UK	Product Code EU	Length* (mm)	Grip range (mm)		Inner Box qty.	Outer Box qty.	Shear N	Tensile N
			Min.	Max.				
SD5018	SD5012-BC	12	10	13	500	3000	3100	4000

Ø 6.0 mm

Dimensions

(see diagram):

d = 6 (+0.08/-0.15)mm

Hole size = 6.1 mm

hd = 12 (+0.4/-0.4)mm

h = 2.5 (+0.4/-0.4) mm

md = 3.6 mm

m = 30mm (min)

Product Code UK	Product Code EU	Length* (mm)	Grip range (mm)		Inner Box qty.	Outer Box qty.	Shear N	Tensile N
			Min.	Max.				
SD6012	SD6012-BC	12	4	6	500	2000	4300	4800
SD6015	SD6015-BC	15	6	9	500	2000	4300	4800
SD6018	SD6018-BC	18	10	12	500	2000	4300	4800
SD6022	SD6022-BC	22	12	16	250	1500	4300	4800
SD6026	SD6026-BC	26	14	19	250	1500	4300	4800
SD6030	SD6030-BC	30	19	24	250	1500	4300	4800

Ø 6.4 mm

Dimensions

(see diagram):

d = 6.4 (+0.08/-0.15)mm

Hole size = 6.4 mm

hd = 13 (+0.4/-0.4)mm

h = 2.7 (+0.4/-0.4) mm

md = 3.8 mm

m = 30mm (min)

Product Code UK	Product Code EU	Length* (mm)	Grip range (mm)		Inner Box qty.	Outer Box qty.	Shear N	Tensile N
			Min.	Max.				
SD6410	SD6410-BC	10	1.5	4	500	2000	4900	5700
SD6412	SD6412-BC	12	4	6	500	2000	4900	5700
SD6415	SD6415-BC	15	5	8	250	1000	4900	5700
SD6418	SD6418-BC	18	8	12.5	250	1000	4900	5700
SD6422	SD6422-BC	22	12.5	16	250	1000	4900	5700
SD6426	SD6426-BC	26	13	19	250	1000	4900	5700
SD6430	SD6430-BC	30	19	24	250	1000	4900	5700