

# AASEAL - Sealed Rivet



 Rivetti ermetici 
  nity szczelne 
  Trhací nýty vodotěsné



Dome Head | Testa STANDARD | kołnierz Standardowy | Plochá hlava

1 **Body:** Aluminium | ALLUMINIO | ALUMINIUM | HLINÍK

2 **Mandrel:** Aluminium | ALLUMINIO | ALUMINIUM | HLINÍK

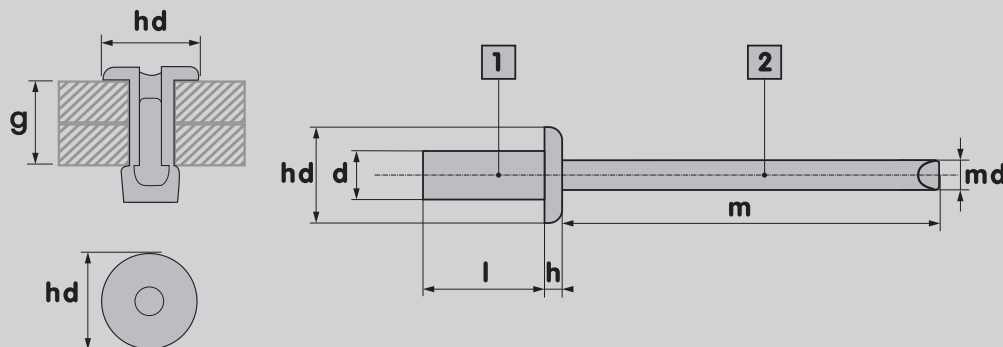

## Ø 3.2 mm

### Dimensions

(see diagram):

d = 3.2 (+0.08/-0.15)mm

Hole size = 3.3 mm

hd = 6 (+0.2/-0.3)mm

h = 1.3 (+0.1/-0.3) mm

md = 1.85 mm

m = 26mm (min)

| Product Code UK | Product Code EU | Length* (mm) | Grip range (mm) |     | Inner Box qty. | Outer Box qty. | Shear N | Tensile N |
|-----------------|-----------------|--------------|-----------------|-----|----------------|----------------|---------|-----------|
| Min.            | Max.            |              |                 |     |                |                |         |           |
| AASEAL3207      | WHD3207-BC      | 7            | 3               | 5   | 2000           | 12000          | 460     | 540       |
| AASEAL3208      | WHD3208-BC      | 8            | 2               | 3.5 | 2000           | 12000          | 460     | 540       |
| AASEAL3210      | WHD3209-BC      | 9.5          | 3.5             | 5.5 | 2000           | 8000           | 460     | 540       |

## Ø 4.0 mm

### Dimensions

(see diagram):

d = 4 (+0.08/-0.15)mm

Hole size = 4.1 mm

hd = 8 (+0.2/-0.4)mm

h = 1.7 (+0.1/-0.4) mm

md = 2.35 mm

m = 27mm (min)

| Product Code UK | Product Code EU | Length* (mm) | Grip range (mm) |   | Inner Box qty. | Outer Box qty. | Shear N | Tensile N |
|-----------------|-----------------|--------------|-----------------|---|----------------|----------------|---------|-----------|
| Min.            | Max.            |              |                 |   |                |                |         |           |
| AASEAL4008      | WHD4080-BC      | 8            | 3               | 5 | 1000           | 6000           | 900     | 1120      |
| AASEAL4010      | WHD4010-BC      | 9.5          | 3.5             | 5 | 1000           | 6000           | 720     | 760       |
| AASEAL4012      | WHD4012-BC      | 12.5         | 6.5             | 8 | 1000           | 6000           | 720     | 760       |

## Ø 4.8 mm

### Dimensions

(see diagram):

d = 4.8 (+0.08/-0.15)mm

Hole size = 4.9 mm

hd = 9.5 (+0.2/-0.5)mm

h = 2 (+0.1/-0.5) mm

md = 2.75 mm

m = 28mm (min)

| Product Code UK | Product Code EU | Length* (mm) | Grip range (mm) |     | Inner Box qty. | Outer Box qty. | Shear N | Tensile N |
|-----------------|-----------------|--------------|-----------------|-----|----------------|----------------|---------|-----------|
| Min.            | Max.            |              |                 |     |                |                |         |           |
| AASEAL4809      | WHD4809-BC      | 9.5          | 4               | 5.5 | 1000           | 6000           | 900     | 1120      |
| AASEAL4811      | WHD4811-BC      | 11.5         | 5.5             | 7   | 500            | 3000           | 1000    | 1400      |
| AASEAL4814      | WHD4814-BC      | 14.5         | 7.5             | 9   | 500            | 3000           | 1000    | 1400      |
| AASEAL4818      | WHD4818-BC      | 18           | 11              | 13  | 500            | 3000           | 1000    | 1400      |
| AASEAL4821      | WHD4821-BC      | 21           | 13              | 15  | 250            | 2000           | 1000    | 1400      |

\* tolerance +1.0/-0.20mm

  
 Available from:



The Rivet Company, Unit 7,  
 Beacon Business Park,  
 Weston Road, Stafford ST18 0DG.

Tel: 01785 246539  
 Email: [sales@rivetcompany.co.uk](mailto:sales@rivetcompany.co.uk)  
[www.rivetcompany.co.uk](http://www.rivetcompany.co.uk)