

# RNSFC - Knurled Rivetnut Closed end

Inserto filettato cilindrico zigrinato cieco  
rádlované tělo uzavřený



nitonakrętki radełkowane szczelne

element<sup>®</sup>  
THE ART OF RIVETING KNOWLEDGE



Flanged Head | Testa STANDARD | kołnierz CYLINDRYCZNY | Plochá hlava

Closed end | Inserto filettato cilindrico zigrinato cieco | nitonakrętki radełkowane szczelne | rádlované tělo uzavřený

Steel | ACCIAIO | STAL | OCEL

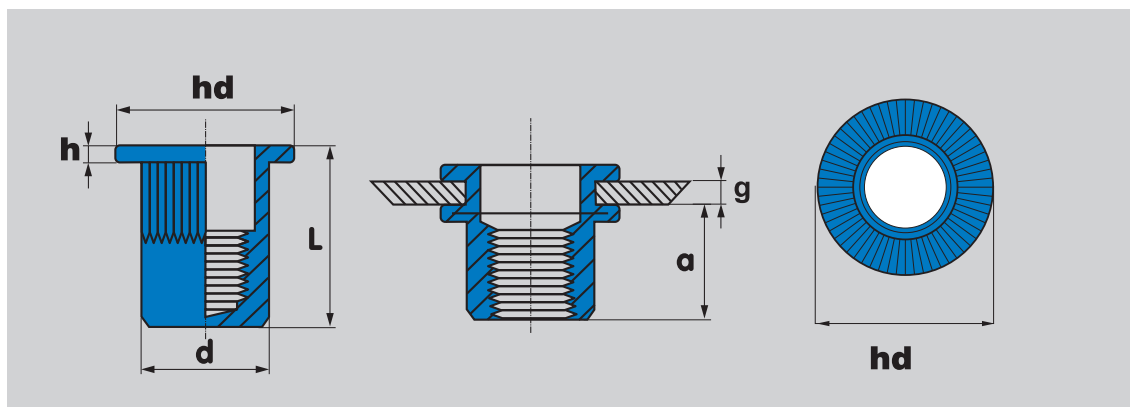

| Product Code UK | Product Code EU | Thread Size | Diameter (d)<br>(+0.07/-0.1) | Length (L)<br>(+0.5/-0.5) | Head Dia. (hd)<br>(+0.5/-0.1) | Head Thickness(h)<br>(+0.20/-0.20)* | Grip range (mm) |          | Inner Box qty. | Outer Box qty. |
|-----------------|-----------------|-------------|------------------------------|---------------------------|-------------------------------|-------------------------------------|-----------------|----------|----------------|----------------|
|                 |                 |             |                              |                           |                               |                                     | Min.            | Max. (g) |                |                |
| RNSFC0430       | TCBD0430-BC     | M4          | 5.9                          | 17.5                      | 9                             | 1                                   | 0.5             | 3        | 1,000          | 6,000          |
| RNSFC0530       | TCBD0530-BC     | M5          | 6.9                          | 20                        | 10                            | 1                                   | 0.5             | 3        | 1,000          | 4,000          |
| RNSFC0630       | TCBD0630-BC     | M6          | 8.9                          | 23.5                      | 13                            | 1.5                                 | 0.5             | 3        | 1,000          | 4,000          |
| RNSFC0830       | TCBD0830-BC     | M8          | 10.9                         | 26.5                      | 16                            | 1.5                                 | 0.5             | 3        | 500            | 2,000          |
| RNSFC1030       | TCBD1030-BC     | M10         | 12.9                         | 39                        | 19                            | 2                                   | 1               | 3        | 250            | 1,000          |



| Size Ø | Hole Size (mm) | Recommended Max Torque (Nm) | Pull Out (N) | Shear (N) |
|--------|----------------|-----------------------------|--------------|-----------|
| M4     | 6              | 4.5                         | 5,000        | 1,700     |
| M5     | 7              | 7.8                         | 11,300       | 2,800     |
| M6     | 9              | 19.8                        | 18,000       | 3,500     |
| M8     | 11             | 29                          | 28,000       | 4,500     |
| M10    | 13             | 32                          | 29,000       | 4,900     |

element<sup>®</sup>  
Available from:

the RIVET  
COMPANY

The Rivet Company, Unit 7,  
Beacon Business Park,  
Weston Road, Stafford ST18 0DG.

Tel: 01785 246539  
Email: sales@therivetco.co.uk  
[www.therivetcompany.co.uk](http://www.therivetcompany.co.uk)