

RNSF - Knurled Rivetnut

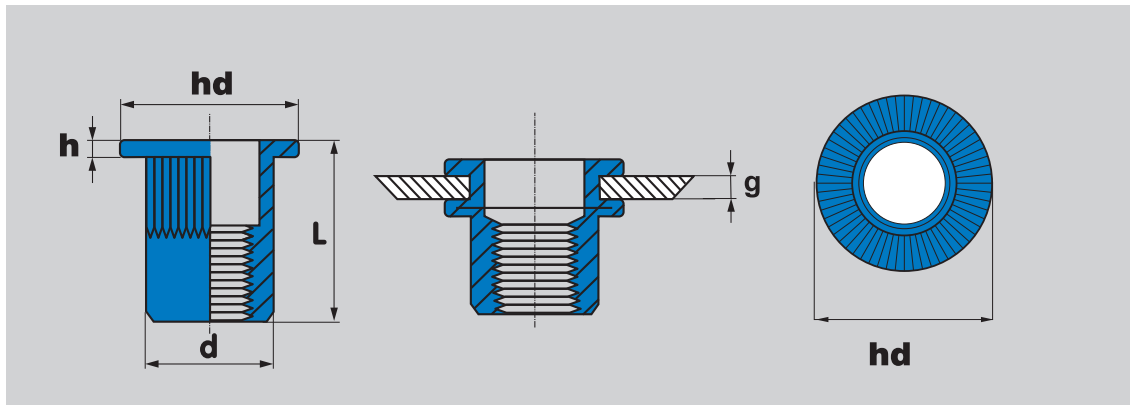
 Inserto filettato cilindrico zigrinato
  nitonakrętki radełkowane
  rádlované tělo





Flanged Head | Testa STANDARD | kołnierz CYLINDRYCZNY | Plochá hlava

Knurled Insert | Inserto filettato cilindrico zigrinato | nitonakrętki radełkowane | rádlované tělo

Steel | ACCIAIO | STAL | OCEL



Product Code UK	Product Code EU	Thread Size	Diameter (d) (+0.07/-0.1)	Length (L) (+0.5/-0.5)	Head Dia. (hd) (+0.5/-0.1)	Head Thickness(h) (+0.20/-0.20)*	Grip range (mm)		Inner Box qty.	Outer Box qty.
							Min.	Max. (g)		
RNSF0330	TCD0330-BC	M3	4.9	11	8	1	0.5	3	1,000	6,000
RNSF0430	TCD0430-BC	M4	5.9	11	9	1	0.5	3	1,000	6,000
RNSF0440	TCD0440-BC	M4	5.9	13	9	1	3	4	1,000	6,000
RNSF0530	TCD0530-BC	M5	6.9	13	10	1	0.5	3	1,000	6,000
RNSF0560	TCD0540-BC	M5	6.9	16	10	1	3	6	1,000	6,000
RNSF0630	TCD0630-BC	M6	8.9	16	12.3	1.5	0.5	3	1,000	4,000
RNSF0660	TCD0660-BC	M6	8.9	19	12.3	1.5	3	6	500	2,000
RNSF0830	TCD0830-BC	M8	10.9	17.5	14.5	1.5	0.5	3	500	2,000
RNSF0860	TCD0855-BC	M8	10.9	20.5	14.5	1.5	3	6	500	2,000
RNSF0880	TCD0880-BC	M8	10.9	21.5	14.5	1.5	5	8	500	2,000
RNSF0811	TCD0811-BC	M8	10.9	26.5	14.5	1.5	8	11	500	2,000
RNSF1040	TCD1040-BC	M10	12.9	19	17	2	1	4	500	2,000
RNSF1060	TCD1060-BC	M10	12.9	24	17	2	3	6	300	1,200
RNSF1240	TCD1240-BC	M12	15.9	25	18	2	1	4	200	800
RNSF1260	TCD1260-BC	M12	15.9	28	18	2	4	6	200	800
RNSF1660P*	TCD1660-BC	M16	20.9	30.3	26	3	2	5	100	400

Size Ø				
	Hole Size (mm)	Recommended Max Torque (Nm)	Pull Out (N)	Shear (N)
M3	5	3	4,000	900
M4	6	4.5	5,000	1,700
M5	7	5.4	11,300	2,800
M6	9	19.8	18,000	3,500
M8	11	a29	28,000	4,500
M10	13.1	32	29,000	5,000
M12	16	43.7	48,000	6,800
M16	21	52.6	80,000	10,600

* Please note: RNSF1660P is a plain rivnut and has a head thickness (h) tolerance of +0.35/-0.35.


 Available from:



The Rivet Company, Unit 7,
 Beacon Business Park,
 Weston Road, Stafford ST18 0DG.

Tel: 01785 246539
 Email: sales@therivetco.co.uk
www.therivetcompany.co.uk