

ADS - Standard Rivet



 Rivetto standard  nity zrywalne standardowe  Trhací nýty



Dome Head | Testa STANDARD | kołnierz Standardowy | Plochá hlava

1 Body: Aluminium | ALLUMINIO | ALUMINIUM | HLINÍK

2 Mandrel: Steel | ACCIAIO | STAL | OCEL

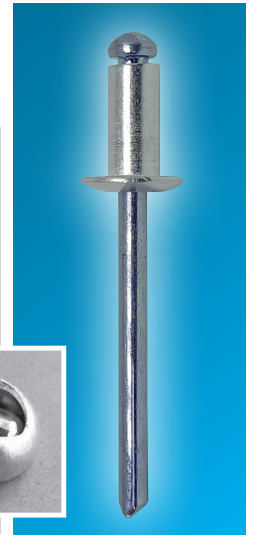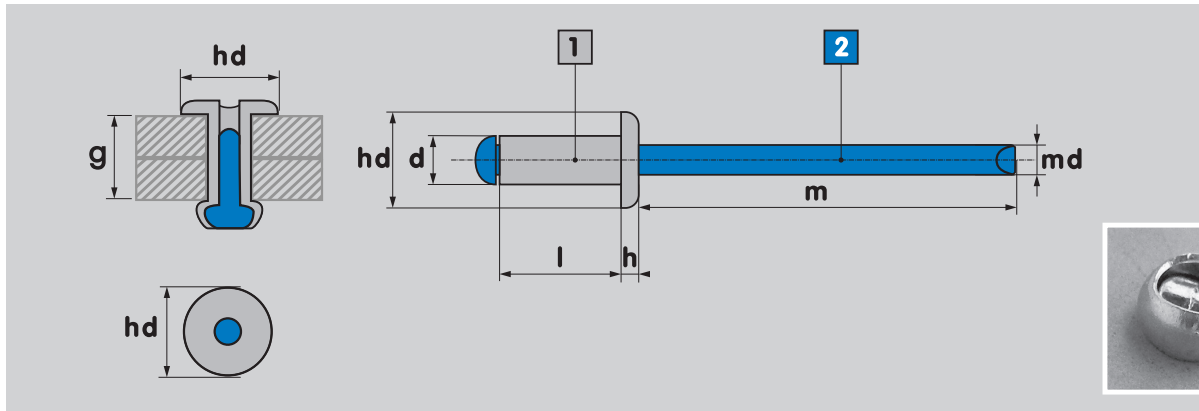

Ø2.4 mm

Dimensions

(see diagram):

d = 2.4 (+0.08/-0.15)mm

Hole size = 2.5 mm

hd = 5 (+0.2/-0.2)mm

h = 1 (+0.2/-0.2) mm

md = 1.4 mm

m = 25mm (min)

Product Code UK	Product Code EU	Length* (mm)	Grip range (mm)		Inner Box qty.	Outer Box qty.	Shear N	Tensile N
			Min.	Max.				
ADS2404	ASD2404-BC	4.5	0.5	2	2000	12000	300	500
ADS2406	ASD2406-BC	6	2	4	2000	12000	300	500
ADS2408	ASD2408-BC	8	4	6	2000	12000	300	500
ADS2410	ASD2410-BC	10	6	8	2000	12000	300	500
ADS2412	ASD2412-BC	12	8	9.5	2000	12000	300	500

Ø 3.0 mm

Dimensions

(see diagram):

d = 3 (+0.08/-0.15)mm

Hole size = 3.1 mm

hd = 6.5 (+0.2/-0.2)mm

h = 1.3 (+0.2/-0.2) mm

md = 1.8 mm

m = 25mm (min)

Product Code UK	Product Code EU	Length* (mm)	Grip range (mm)		Inner Box qty.	Outer Box qty.	Shear N	Tensile N
			Min.	Max.				
ADS3004	ASD3004-BC	4.5	0.5	1.5	2000	12000	500	800
ADS3006	ASD3006-BC	6	1.5	3.5	2000	12000	500	800
ADS3008	ASD3008-BC	8	3.5	5	2000	8000	500	800
ADS3010	ASD3010-BC	10	5	7	2000	8000	500	800
ADS3012	ASD3012-BC	12	7	9	1000	4000	500	800
ADS3014	ASD3014-BC	14	9	11	1000	4000	500	800
ADS3016	ASD3016-BC	16	9	13	1000	4000	500	800
ADS3018	ASD3018-BC	18	13	15	1000	4000	500	800
ADS3020	ASD3020-BC	20	13	17	1000	4000	500	800

Ø 3.2 mm

Dimensions

(see diagram):

d = 3.2 (+0.08/-0.15)mm

Hole size = 3.3 mm

hd = 6.5 (+0.2/-0.2)mm

h = 1.3 (+0.2/-0.2) mm

md = 1.8 mm

m = 25mm (min)

Product Code UK	Product Code EU	Length* (mm)	Grip range (mm)		Inner Box qty.	Outer Box qty.	Shear N	Tensile N
			Min.	Max.				
ADS3206	ASD3206-BC	6	1.5	3.5	2000	12000	760	980
ADS3208	ASD3208-BC	8	3.5	5	2000	12000	760	980
ADS3210	ASD3210-BC	10	5	7	2000	8000	760	980
ADS3212	ASD3212-BC	12	7	9	2000	8000	760	980
ADS3214	ASD3214-BC	14	9	11	2000	8000	760	980
ADS3216	ASD3216-BC	16	9	13	1000	4000	760	980
ADS3218	ASD3218-BC	18	13	15	1000	4000	760	980
ADS3220	ASD3220-BC	20	13	17	1000	4000	760	980
ADS3225	ASD3225-BC	25	17	22	500	4000	760	980

* tolerance +1.0/-0.20mm

Page 1/3

element®
Available from:

the
RIVET
COMPANY

The Rivet Company, Unit 7,
Beacon Business Park,
Weston Road, Stafford ST18 0DG.

Tel: 01785 246539
Email: sales@therivetco.co.uk
www.therivetcompany.co.uk

ADS - Standard Rivet

 Rivetto standard  nity zrywalne standardowe  Trhací nýty



Ø 3.4 mm

Dimensions

(see diagram):

d = 3.4 (+0.08/-0.15)mm

Hole size = 3.5 mm

hd = 7 (+0.2/-0.2)mm

h = 1.4 (+0.2/-0.2) mm

md = 1.8 mm

m = 25mm (min)

Product Code UK	Product Code EU	Length* (mm)	Grip range (mm)		Inner Box qty.	Outer Box qty.	Shear N	Tensile N
			Min.	Max.				
ADS3407	ASD3407-BC	7	1.5	3.5	2000	12000	800	1000
ADS3409	ASD3409-BC	9	3.5	5.5	2000	8000	800	1000

Ø 4.0 mm

Dimensions

(see diagram):

d = 4 (+0.08/-0.15)mm

Hole size = 4.1 mm

hd = 8 (+0.3/-0.3)mm

h = 1.7 (+0.3/-0.3) mm

md = 2.2 mm

m = 27mm (min)

Product Code UK	Product Code EU	Length* (mm)	Grip range (mm)		Inner Box qty.	Outer Box qty.	Shear N	Tensile N
			Min.	Max.				
ADS4006	ASD4006-BC	6	1	3	1000	6000	1200	1600
ADS4007	ASD4007-BC	7	2	4	1000	6000	1200	1600
ADS4008	ASD4008-BC	8	3	5	1000	6000	1200	1600
ADS4010	ASD4010-BC	10	5	6.5	1000	6000	1200	1600
ADS4012	ASD4012-BC	12	6.5	8.5	1000	6000	1200	1600
ADS4014	ASD4014-BC	14	8.5	10.5	1000	4000	1200	1600
ADS4016	ASD4016-BC	16	8.5	12.5	1000	4000	1200	1600
ADS4018	ASD4018-BC	18	12.5	14.5	1000	4000	1200	1600
ADS4020	ASD4020-BC	20	12.5	16.5	1000	4000	1200	1600
ADS4023	ASD4023-BC	23	16.5	19	500	2000	1200	1600
ADS4025	ASD4025-BC	25	16.5	21.5	500	2000	1200	1600
ADS4027	ASD40270-BC	27	18	22	500	2000	122	1600
ADS4030	ASD4030-BC	30	21	25	500	2000	1200	1600
ADS4035	ASD4035-BC	35	26	30	500	2000	1200	1600

Ø 4.8 mm

Dimensions

(see diagram):

d = 4.8 (+0.08/-0.15)mm

Hole size = 4.9 mm

hd = 9.5 (+0.3/-0.3)mm

h = 2 (+0.3/-0.3) mm

md = 2.7 mm

m = 27mm (min)

Product Code UK	Product Code EU	Length* (mm)	Grip range (mm)		Inner Box qty.	Outer Box qty.	Shear N	Tensile N
			Min.	Max.				
ADS4806	ASD4806-BC	6	1.5	2.5	1000	4000	1690	2230
ADS4808	ASD4808-BC	8	2.5	4	1000	4000	1690	2230
ADS4810	ASD4810-BC	10	4	6	1000	4000	1690	2230
ADS4812	ASD4812-BC	12	6	8	1000	4000	1690	2230
ADS4814	ASD4814-BC	14	8	10	500	3000	1690	2230
ADS4816	ASD4816-BC	16	8	12	500	3000	1690	2230
ADS4818	ASD4818-BC	18	12	14	500	3000	1690	2230
ADS4820	ASD4820-BC	20	12	16	500	3000	1690	2230
ADS4822	ASD4822-BC	22	16	18	500	3000	1690	2230
ADS4825	ASD4825-BC	25	15	20	500	2000	1690	2230
ADS4830	ASD4830-BC	30	21	25	500	2000	1690	2230
ADS4835	ASD4835-BC	35	25	30	500	2000	1690	2230
ADS4840	ASD4840-BC	40	30	35	400	1600	1690	2230
ADS4845	ASD4845-BC	45	35	39	400	1600	1690	2230
ADS4850	ASD4850-BC	50	39	44	200	800	1690	2230
ADS4860	ASD4860-BC	60	49	54	200	800	1690	2230
ADS4880	ASD4880-BC	80	70	75	100	400	1690	2230

Ø 5.0 mm

Dimensions

(see diagram):

d = 5 (+0.08/-0.15)mm

Hole size = 5.1 mm

hd = 9.5 (+0.3/-0.3)mm

h = 2.1 (+0.3/-0.3) mm

md = 2.7 mm

m = 27mm (min)

Product Code UK	Product Code EU	Length* (mm)	Grip range (mm)		Inner Box qty.	Outer Box qty.	Shear N	Tensile N
			Min.	Max.				
ADS5008	ASD5008-BC	8	2.5	4	1000	4000	2000	2800
ADS5012	ASD5012-BC	12	6	8	500	2000	2000	2800
ADS5018	ASD50180-BC	18	8	12	500	3000	2000	2800

Page 2/3

ADS - Standard Rivet

 Rivetto standard  nity zrywalne standardowe  Trhací nýty

Ø 6.0 mm

Dimensions

(see diagram):

d = 6 (+0.08/-0.15)mm

Hole size = 6.1 mm

hd = 12 (+0.4/-0.4)mm

h = 2.5 (+0.4/-0.4) mm

md = 3.6 mm

m = 30mm (min)

Product Code UK	Product Code EU	Length* (mm)	Grip range (mm)		Inner Box qty.	Outer Box qty.	Shear N	Tensile N
			Min.	Max.				
ADS6008	ASD6008-BC	8	2	3	500	2000	3000	3900
ADS6010	ASD6010-BC	10	3	5	500	2000	3000	3900
ADS6012	ASD6012-BC	12	5	7	500	2000	3000	3900
ADS6016	ASD6016-BC	16	7	11	250	1000	3000	3900
ADS6018	ASD6018-BC	18	11	13	250	1000	3000	3900
ADS6022	ASD6022-BC	22	13	17	250	1000	3000	3900
ADS6026	ASD6026-BC	26	15	20	250	1000	3000	3900
ADS6030	ASD6030-BC	30	20	25	250	1000	3000	3900
ADS6035	ASD6035-BC	35	23	28	250	1000	3000	3900
ADS6040	ASD6040-BC	40	28	33	250	1000	3000	3900

Ø 6.4 mm

Dimensions

(see diagram):

d = 6.4 (+0.08/-0.15)mm

Hole size = 6.5 mm

hd = 13 (+0.4/-0.4)mm

h = 2.7 (+0.4/-0.4) mm

md = 3.8 mm

m = 30mm (min)

Product Code UK	Product Code EU	Length* (mm)	Grip range (mm)		Inner Box qty.	Outer Box qty.	Shear N	Tensile N
			Min.	Max.				
ADS6408	ASD64080-BC	8	1.5	3	500	2000	3120	4190
ADS6410	ASD6410-BC	10	3	4	500	2000	3120	4190
ADS6412	ASD6412-BC	12	3	6	500	2000	3120	4190
ADS6415	ASD6415-BC	15	6	10	250	1000	3120	4190
ADS6418	ASD6418-BC	18	10	12	250	1000	3120	4190
ADS6422	ASD6422-BC	22	13	16	250	1000	3120	4190
ADS6426	ASD6426-BC	26	14	18	250	1000	3120	4190
ADS6430	ASD6430-BC	30	18	23	250	1000	3120	4190
ADS6435	ASD6435-BC	35	23	28	250	1000	3120	4190
ADS6440	ASD6440-BC	40	28	33	250	1000	3120	4190

* tolerance +1.0/-0.20mm

Page 3/3