


ALB - Lockbolt

🇮🇹 Bulloni a strappo 🇵🇱 Śruby konstrukcyjne 🇨🇪 Pojistné šrouby s kroužkem



Dome Head | Testa STANDARD | kołnierz Standardowy | Plochá hlava

1 Body: Aluminium | ALLUMINIO | ALUMINIUM | HLINÍK

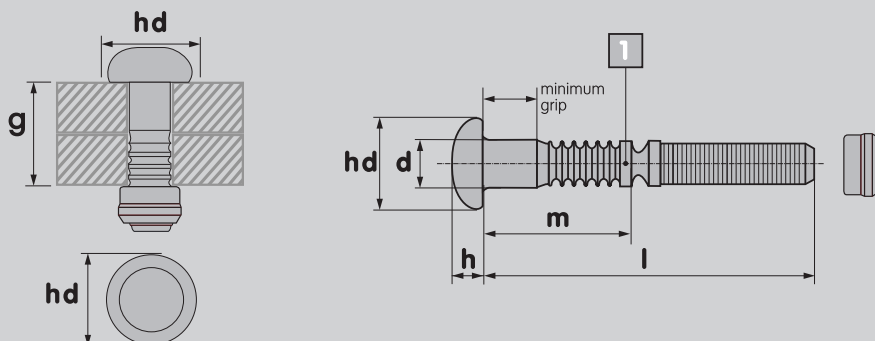

Ø 6.4 mm

Dimensions

(see diagram):

d = 6.4 (+0.0/-0.2)mm

Hole size = 6.6 mm

hd = 12.5 (+0.1/-1.4)mm

h = 3.65 (+0.2/-0.2) mm

md = mm


m = mm (min)

Product Code UK	Product Code EU	Length* (mm)	Grip range (mm)		Inner Box qty.	Outer Box qty.	Shear N	Tensile N
Min.	Max.							
ALB0803	HBHD0803-BC	42.9	3.2	6.4	500	2000	8300	7900
ALB0804	HBHD0804-BC	44.5	4.8	8	500	2000	8300	7900

2LC - Lockbolt collars



Product Code UK	Product Code EU	Length* cl (mm)	For bolt Diameter	Material	Inner	Outer
2LC-R6G	HBSD-06-BC	5.8	4.8	Steel	4000	24000
2LC-R8G	HBSD-08-BC	7.75	6.4	Steel	1700	10200
2LC-R10G	HBSD-10-BC	9.27	8.0	Steel	1000	4000
2LC-R12G	HBSD-12-BC	11.3	9.6	Steel	500	2000



2LC-R6G

Dimensions

(see diagram):

icd = 4.8 (+1.1/-1.1)mm

ocd = 8

(min 6.2/max7.7)

2LC-R8G

Dimensions

(see diagram):

icd = 6.4 (+1.1/-1.1)mm

ocd = 10.3

(min 8.2/max10.1)mm

2LC-R10G

Dimensions

(see diagram):

icd = 8 (+1.1/-1.1)mm

ocd = 12.43

(min 9.5/max12.3)mm

2LC-R12G

Dimensions

(see diagram):

icd = 9.6 (+1.1/-1.1)mm

ocd = 15.11

(min 11.9/max14.9)mm

2LC-F8

Dimensions

(see diagram):

icd = 6.4 (+1.1/-1.1)mm

ocd = 10.3

(min8.2/max10.1)mm

* tolerance +1.0/-0.20mm

element®
Available from:

the RIVET
COMPANY

The Rivet Company, Unit 7,
Beacon Business Park,
Weston Road, Stafford ST18 0DG.

Tel: 01785 246539
Email: sales@therivetco.co.uk
www.therivetcompany.co.uk