


AWD - Standard Rivet

 Rivetto standard  nity zrywalne standardowe  Trhací nýty

Dome Head | Testa STANDARD | kołnierz Standardowy | Plochá hlava

1 Body: Aluminium | ALLUMINIO | ALUMINIUM | HLINÍK

2 Mandrel: Steel | ACCIAIO | STAL | OCEL

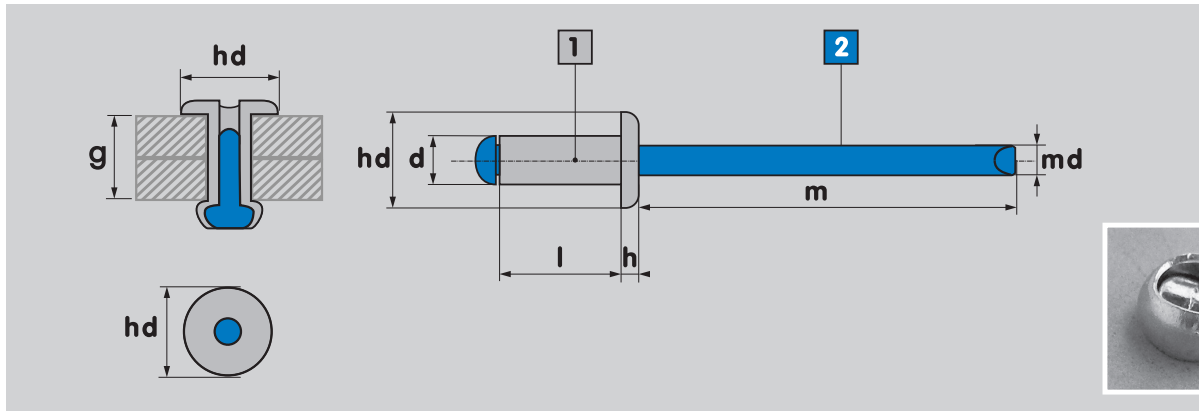

Ø 3.2 mm

Dimensions

(see diagram):

d = 3.2 (+0.08/-0.15)mm

Hole size = 3.3 mm

hd = 6.5 (+0.2/-0.2)mm

h = 1.3 (+0.2/-0.2) mm

md = 1.8 mm

m = 25mm (min)

Product Code UK	Product Code EU	Length* (mm)	Grip range (mm)		Inner Box qty.	Outer Box qty.	Shear N	Tensile N
			Min.	Max.				
AWD3206	ASD-R32060-BC	6	1.5	3.5	2000	12000	760	980
AWD3208	ASD3208-BC-R9010	8	3.5	5	2000	8000	760	980
AWD3210	ASD3210-BC-R9010	10	5	7	2000	8000	760	980
AWD3212	ASD3212-BC-R9010	12	7	9	2000	8000	760	980
AWD3216	AWD32160-BC	16	9	13	1000	4000	760	980

Ø 3.4 mm

Dimensions

(see diagram):

d = 3.4 (+0.08/-0.15)mm

Hole size = 3.5 mm

hd = 7 (+0.2/-0.2)mm

h = 1.4 (+0.2/-0.2) mm

md = 1.8 mm

m = 25mm (min)

Product Code UK	Product Code EU	Length* (mm)	Grip range (mm)		Inner Box qty.	Outer Box qty.	Shear N	Tensile N
			Min.	Max.				
AWD3407	AWD3407-BC	7	3.5	5	2000	8000	800	1000
AWD3409	AWD3409-BC	9	3.5	5	2000	8000	800	1000

Ø 4.0 mm

Dimensions

(see diagram):

d = 3.2 (+0.08/-0.15)mm

Hole size = 3.3 mm

hd = 6.5 (+0.2/-0.2)mm

h = 1.3 (+0.2/-0.2) mm

md = 1.8 mm

m = 25mm (min)

Product Code UK	Product Code EU	Length* (mm)	Grip range (mm)		Inner Box qty.	Outer Box qty.	Shear N	Tensile N
			Min.	Max.				
AWD4008	ASD4008-BC-R9010	8	3	5	1000	6000	1200	1600
AWD4010	ASD4010-BC-R9010	10	5	6.5	1000	6000	1200	1600
AWD4012	ASD4012-BC-R9010	12	6.5	8.5	1000	6000	1200	1600
AWD4014	ASD4014-BC-R9010	14	8.5	10.5	1000	4000	1200	1600
AWD4016	ASD-R40160-BC	16	8.5	12.5	1000	4000	1200	1600
AWD4018	AWD4018-BC	18	12.5	14.5	1000	4000	1200	1600
AWD4020	ASD-R901-BC	20	12	16.5	1000	4000	1200	1600

* tolerance +1.0/-0.20mm

Page 1/2

AWD - Standard Rivet

 Rivetto standard  nity zrywalne standardowe  Trhací nýty

Ø 4.8 mm

Dimensions

(see diagram):

d = 4.8 (+0.08/-0.15)mm

Hole size = 4.9 mm

hd = 9.5 (+0.2/-0.2)mm

h = 2 (+0.3/-0.3) mm

md = 2.7 mm

m = 27mm (min)

Product Code UK	Product Code EU	Length* (mm)	Grip range (mm)		Inner Box qty.	Outer Box qty.	Shear N	Tensile N
			Min.	Max.				
AWD4808	ASD-R48080-BC	8	2.5	4	1000	4000	1690	2230
AWD4810	ASD4810-BC-R9010	10	4	6	1000	4000	1690	2230
AWD4812	ASD4812-BC-R9010	12	6	8	1000	4000	1690	2230
AWD4814	ASD4814-BC-R9010	14	8	10	1000	3000	1690	2230
AWD4816	AWD4816-BC	16	8	12	500	3000	1690	2230
AWD4820	AWD4820-BC	20	12	16	500	3000	1690	2230
AWD4825	AWD4824-BC	25	15	20	500	2000	1690	2230

* tolerance +1.0/-0.20mm

Page 2/2