

RNA2F - Knurled Rivetnut


 Inserto filettato cilindrico zigrinato
  nitonakrętki radełkowane
  rádlované tělo



Flanged Head | Testa STANDARD | kołnierz CYLINDRYCZNY | Plochá hlava

Knurled Insert | Inserto filettato cilindrico zigrinato | nitonakrętki radełkowane | rádlované tělo

Stainless Steel A2 | ACCIAIO INOX A2 | STAL NIERDZEWNIA A2 | NEREZ A2

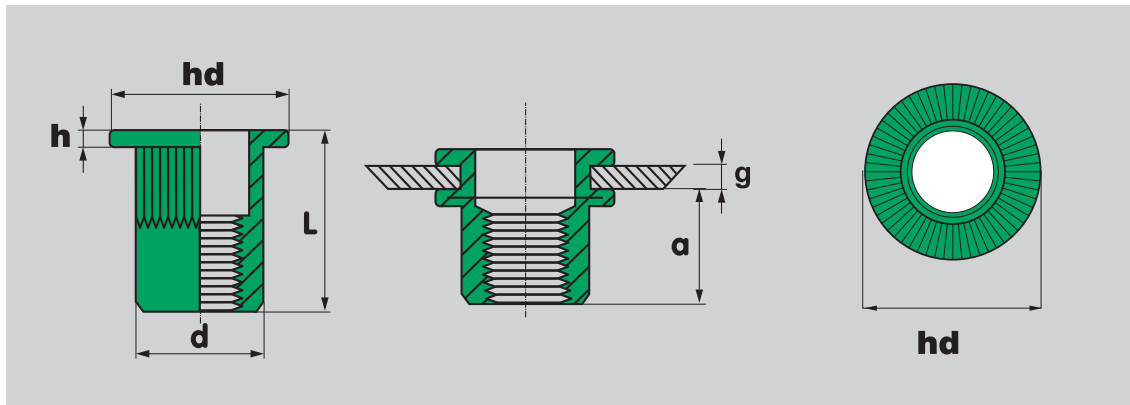

									
Product Code UK	Product Code EU	Thread Size	Diameter (d) (+0.07/-0.1)	Length (L) (+0.5/-0.5)	Head Dia. (hd) (+0.3/-0.3)	Head Thickness(h) (+0.20/-0.20)*	Grip range (mm) Min. Max. (g)	Inner Box qty.	Outer Box qty.
RNA2F0330	END0330-BC	M3	4.9	11	7	1	0.5 3	1,000	6,000
RNA2F0430	END0430-BC	M4	5.9	11	9	1	0.5 3	1,000	6,000
RNA2F0440	END0440-BC	M4	5.9	13	9	1	3 4	1,000	6,000
RNA2F0530	END0530-BC	M5	6.9	13	10	1	0.5 3	1,000	6,000
RNA2F0560	END0540-BC	M5	6.9	16	10	1	3 6	1,000	6,000
RNA2F0630	END0630-BC	M6	8.9	16	13	1.5	0.5 3	1,000	4,000
RNA2F0660	END0645-BC	M6	8.9	19	13	1.5	3 6	1,000	4,000
RNA2F0830	END0830-BC	M8	10.9	17.5	14.5	1.5	0.5 3	500	2,000
RNA2F0860	END0855-BC	M8	10.9	20.5	14.5	1.5	3 6	500	2,000
RNA2F1030	END1030-BC	M10	12.9	19	17	2	1 3	250	1,000
RNA2F1065	END1060-BC	M10	12.9	24	17	2	3 6.5	250	1,000
RNA2F1240	END1240-BC	M12	15.9	24	20	2	1 4	200	800

Size Ø	Hole Size (mm)	Recommended Max Torque (Nm)	Pull Out (N)	Shear (N)
M3	5	3.5	3,800	900
M4	6	6.9	6,800	2,600
M5	7	10	11,700	2,900
M6	9	20	18,000	4,900
M8	11	29	24,000	6,800
M10	13	38	29,000	7,800
M12	16	45	34,000	8,000


 Available from:



The Rivet Company, Unit 7,
 Beacon Business Park,
 Weston Road, Stafford ST18 0DG.

Tel: 01785 246539
Email: sales@therivetco.co.uk
www.therivetcompany.co.uk