

ADA2 - Standard Rivet


 Rivetto standard  nity zrywalne standardowe  Trhací nýty



Dome Head | Testa STANDARD | kołnierz Standardowy | Plochá hlava

1 Body: Aluminium | ALLUMINIO | ALUMINIUM | HLINÍK

2 Mandrel: Stainless Steel A2 | ACCIAIO INOX A2 | STAL NIERDZEWNNA A2 | NEREZ A2

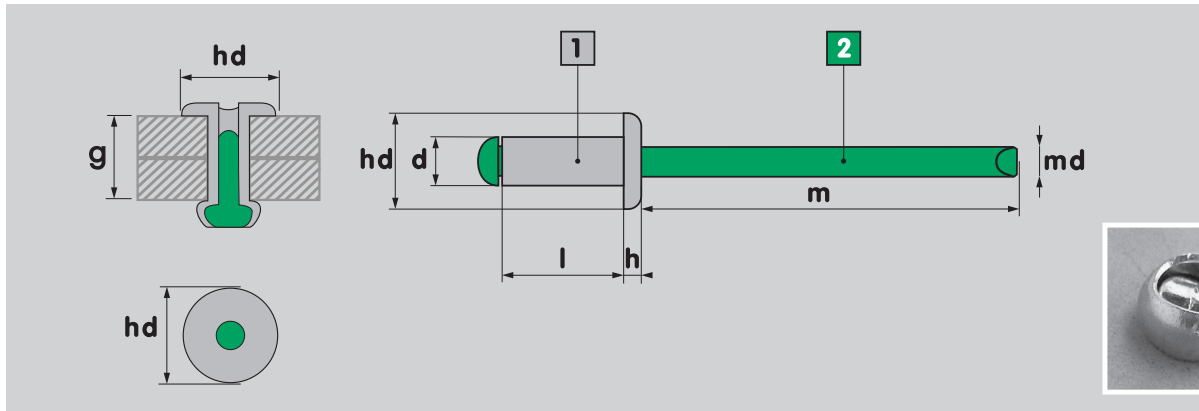

Ø 3.0 mm

Dimensions

(see diagram):

d = 3 (+0.08/-0.15)mm

Hole size = 3.1 mm

hd = 6.5 0.7mm

h = 1.3 mm

md = mm

m = 25mm (min)

Product Code UK	Product Code EU	Length* (mm)	Grip range (mm)		Inner Box qty.	Outer Box qty.	Shear N	Tensile N
ADA23006	AND3006-BC	6	Min.	Max.	2000	12000	500	800
ADA23008	AND3008-BC	8	3.5	5.5	2000	12000	500	800
ADA23010	AND3010-BC	10	5	7	2000	8000	500	800

Ø 3.2 mm

Dimensions

(see diagram):

d = 3.2 (+0.08/-0.15)mm

Hole size = 3.3 mm

hd = 6.5 (+0.2/-0.2)mm

h = 1.3 (+0.2/-0.2) mm

md = 1.8 mm

m = 25mm (min)

Product Code UK	Product Code EU	Length* (mm)	Grip range (mm)		Inner Box qty.	Outer Box qty.	Shear N	Tensile N
ADA23206	AND3206-BC	6	Min.	Max.	2000	12000	760	980
ADA23208	AND3208-BC	8	3.5	5.5	2000	8000	760	980
ADA23210	AND3210-BC	10	5	7	2000	8000	760	980
ADA23212	AND3212-BC	12	7	9	2000	8000	760	980
ADA23216	AND3216-BC	16	10.5	12.5	1000	4000	760	980

Ø 4.0 mm

Dimensions

(see diagram):

d = 4 (+0.08/-0.15)mm

Hole size = 4.1 mm

hd = 8 (+0.3/-0.3)mm

h = 1.7 (+0.3/-0.3) mm

md = 2.2 mm

m = 27mm (min)

Product Code UK	Product Code EU	Length* (mm)	Grip range (mm)		Inner Box qty.	Outer Box qty.	Shear N	Tensile N
ADA24008	AND4008-BC	8	Min.	Max.	1000	6000	1200	1600
ADA24010	AND4010-BC	10	5	6.5	1000	6000	1200	1600
ADA24012	AND4012-BC	12	6.8	8.5	1000	6000	1200	1600
ADA24016	AND4016-BC	16	10	12	1000	4000	1200	1600

* tolerance +1.0/-0.20mm

Page 1/2

element®
Available from:

the RIVET
COMPANY

The Rivet Company, Unit 7,
Beacon Business Park,
Weston Road, Stafford ST18 0DG.

Tel: 01785 246539
Email: sales@therivetco.co.uk
www.therivetcompany.co.uk

V1 - 22/06/26

ADA2 - Standard Rivet

 Rivetto standard  nity zrywalne standardowe  Trhací nýty

Ø 4.8 mm

Dimensions

(see diagram):

d = 4.8 (+0.08/-0.15)mm

Hole size = 4.9 mm

hd = 9.5 (+0.3/-0.3)mm

h = 2 (+0.3/-0.3) mm

md = 2.7 mm

m = 27mm (min)

Product Code UK	Product Code EU	Length* (mm)	Grip range (mm)		Inner Box qty.	Outer Box qty.	Shear N	Tensile N
			Min.	Max.				
ADA24808	AND4808-BC	8	2.5	4.5	1000	4000	1690	2230
ADA24810	AND4810-BC	10	4	6	1000	4000	1850	2600
ADA24812	AND4812-BC	12	6	8	1000	4000	1850	2600
ADA24814	AND4814-BC	12	8	10	500	3000	1690	2230
ADA24816	AND4816-BC	16	8	11	500	3000	1850	2600
ADA24818	AND4818-BC	18	11	13	500	3000	1850	2600
ADA24820	AND4820-BC	20	13	16	500	3000	1850	2600

Ø 5.0 mm

Dimensions

(see diagram):

d = 5 (+0.08/-0.15)mm

Hole size = 5.1 mm

hd = 9.5 (+0.3/-0.3)mm

h = 2.1 (+0.3/-0.3) mm

md = 2.7 mm

m = 27mm (min)

Product Code UK	Product Code EU	Length* (mm)	Grip range (mm)		Inner Box qty.	Outer Box qty.	Shear N	Tensile N
			Min.	Max.				
ADA25010	AND5010-BC	10	4	6	500	3000	2000	2500
ADA25012	AND5012-BC	12	6	8	500	3000	2000	2500