

SDSEAL - Sealed Rivet



 Rivetti ermetici  nity szczelne  Trhací nýty vodotěsné


element®
THE ART OF RIVETING KNOWLEDGE

Dome Head | Testa STANDARD | kołnierz Standardowy | Plochá hlava

1 Body: Steel | ACCIAIO | STAL | OCEL

2 Mandrel: Steel | ACCIAIO | STAL | OCEL

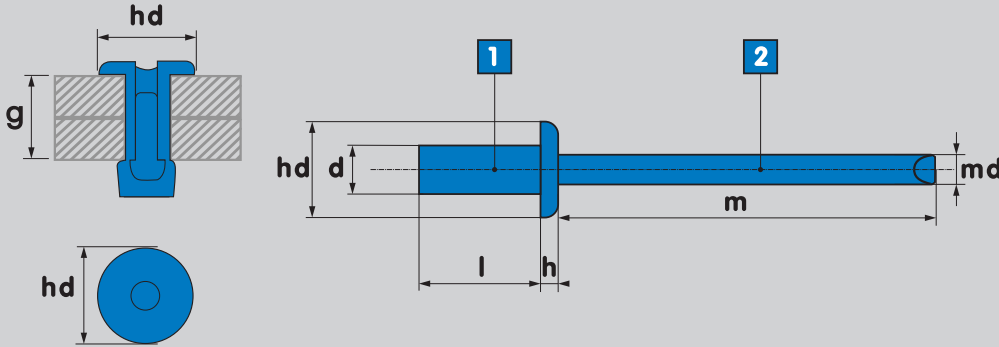

Ø 3.2 mm

Dimensions

(see diagram):

d = 3.2 (+0.08/-0.15)mm

Hole size = 3.3 mm

hd = 6 (+0.2/-0.3)mm

h = 1.3 (+0.1/-0.3) mm

md = 2 mm

m = 26mm (min)

Product Code UK	Product Code EU	Length* (mm)	Grip range (mm)		Inner Box qty.	Outer Box qty.	Shear N	Tensile N
			Min.	Max.				
SDSEAL3208	WSD3208-BC	8	1.5	3	2000	8000	1600	2200
SDSEAL3209	WSD3209-BC	9.5	3	5	2000	8000	1600	2200
SDSEAL3212	WSD3212-BC	12	3.3	6.5	1000	4000	1600	2200

Ø 4.0 mm

Dimensions

(see diagram):

d = 4 (+0.08/-0.15)mm

Hole size = 4.1 mm

hd = 8 (+0.2/-0.4)mm

h = 1.7 (+0.1/-0.4) mm

md = 2.35 mm

m = 27mm (min)

Product Code UK	Product Code EU	Length* (mm)	Grip range (mm)		Inner Box qty.	Outer Box qty.	Shear N	Tensile N
			Min.	Max.				
SDSEAL4008	WSD4008-BC	8	1.5	3	1000	6000	2300	2500
SDSEAL4010	WSD4009-BC	10	3	5	500	6000	2300	2500
SDSEAL4012	WSD4012-BC	12	5	6.5	1000	4000	2300	2500
SDSEAL4015	WSD4015-BC	15	6.5	10.5	1000	4000	2300	2500

Ø 4.8 mm

Dimensions

(see diagram):

d = 4.8 (+0.08/-0.15)mm

Hole size = 4.9 mm

hd = 9.5 (+0.2/-0.5)mm

h = 2 (+0.1/-0.5) mm

md = 2.95 mm

m = 28mm (min)

Product Code UK	Product Code EU	Length* (mm)	Grip range (mm)		Inner Box qty.	Outer Box qty.	Shear N	Tensile N
			Min.	Max.				
SDSEAL4809	WSD4809-BC	9.5	3.5	5	1000	4000	2900	3800
SDSEAL4812	WSD4812-BC	12	5	6.5	1000	4000	2900	3800
SDSEAL4816	WSD4816-BC	16	6.5	10.5	500	3000	2900	3800

* tolerance +1.0/-0.20mm

element®
Available from:

the RIVET
COMPANY

The Rivet Company, Unit 7,
Beacon Business Park,
Weston Road, Stafford ST18 0DG.

Tel: 01785 246539
Email: sales@therivetco.co.uk
www.therivetcompany.co.uk